



# Fuse Plugs on Carrier Terminal Blocks 4 mm<sup>2</sup> 281 Series

<b>Fuse plug with pull-tab</b> for miniature fuses 5 x 20 mm and 5 x 25 mm 250 V / I <sub>N</sub> 6.3 A ④ Plug width 6 mm / 0.236 in.	<b>Fuse plug with pull-tab</b> for miniature fuses 5 x 20 mm and 5 x 25 mm 250 V / I <sub>N</sub> 6.3 A ④ Plug width 6 mm / 0.236 in.
--	--

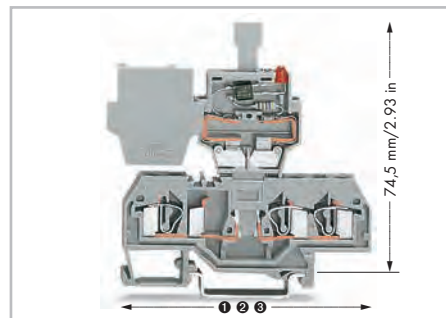

**Dimensions of carrier terminal blocks with fuse plug**  
 ① 59 mm / 2.32 in. for 281-916  
 ② 73.5 mm / 2.89 in. for 281-610  
 ③ 86 mm / 3.39 in. for 281-656

For terminal blocks with side marking, see [www.wagocatalog.com](http://www.wagocatalog.com)

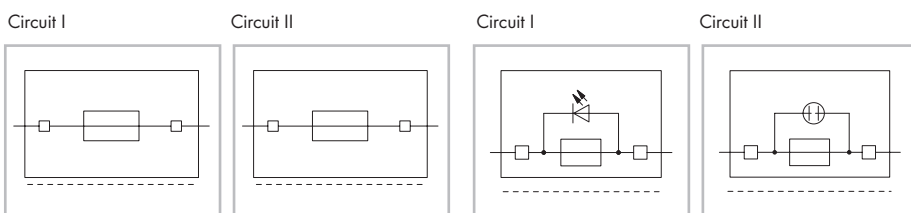

Item No.	Pack. Unit	Item No.	Pack. Unit
<b>Fuse plug with pull-tab,</b> for miniature fuses 5 x 20 mm and 5 x 25 mm, Electrical ratings are given by the fuse. 6 mm wide, gray		<b>Fuse plug with pull-tab,</b> for miniature fuses 5 x 20 mm and 5 x 25 mm, with LED indicator, 24 V AC/DC, Electrical ratings are given by the fuse and blown fuse indication. Leakage current in case of blown fuse: 5 ... 20 mA, 6 mm wide, gray	
○ Circuit I	<b>281-511</b>	50	○ Circuit I
<b>Fuse plug with pull-tab,</b> for miniature fuses 5 x 20 mm and 5 x 25 mm, with hole for one LED (for self-assembly), Electrical ratings are given by the fuse and blown fuse indication. 6 mm wide, gray		<b>Fuse plug with pull-tab,</b> for miniature fuses 5 x 20 mm and 5 x 25 mm, with neon lamp 120 V AC/DC, Electrical ratings are given by the fuse and blown fuse indication. Leakage current in case of blown fuse: Neon lamp < 0.4 mA, 6 mm wide, gray	
○ Circuit II	<b>281-512</b>	50	○ Circuit II
		<b>Fuse plug with pull-tab,</b> for miniature fuses 5 x 20 mm and 5 x 25 mm, with neon lamp 230 V AC/DC, Electrical ratings are given by the fuse and blown fuse indication. Leakage current in case of blown fuse: Neon lamp < 0.4 mA, 6 mm wide, gray	
		○ Circuit II	

## Accessories

<b>4-conductor carrier terminal block,</b> ③ 0.08 ... 4 mm <sup>2</sup> / AWG 28 ... 12, Terminal block width 6 mm / 0.236 in. gray <b>281-656</b> 50	
<b>End and intermediate plate, 2.5 mm thick</b> orange <b>281-335</b> 100 (4x25) gray <b>281-334</b> 100 (4x25)	
<b>Comb-style jumper bar, insulated,</b> I <sub>N</sub> = I <sub>N</sub> terminal block 2-way <b>281-482</b> 100 (4x25) 3-way <b>281-483</b> 100 (4x25) 5-way <b>281-485</b> 100 (4x25) 10-way <b>281-490</b> 50 (2x25)	
<b>Alternate comb-style jumper bar,</b> insulated, I <sub>N</sub> = I <sub>N</sub> terminal block 2-way <b>281-492</b> 100 (4x25)	
<b>Operating tool,</b> of insulating material 2-way <b>280-432</b> 1 3-way <b>280-433</b> 1 5-way <b>281-440</b> 1	
<b>WSB Quick marking system,</b> 10 strips with 10 markers per card, WSB Markers 4 mm wide plain <b>209-701</b> 5	
<b>WSB Quick marking system, plain,</b> 10 strips with 10 markers per card, WSB Markers 4 mm wide yellow <b>209-701/000-002</b> red <b>209-701/000-005</b> blue <b>209-701/000-006</b> gray <b>209-701/000-007</b> orange <b>209-701/000-012</b> light green <b>209-701/000-017</b> green <b>209-701/000-023</b> violet <b>209-701/000-024</b>	
<b>Shorting link, 5 x 20 mm,</b> if the fuse plug is used as disconnect plug I <sub>N</sub> 6.3 A <b>281-503</b> 250 (10x25)	

## Accessories

Appropriate marking system: 4 mm wide WSB for plug and WMB for terminal block

<b>2-conductor carrier terminal block,</b> ① 0.08 ... 4 mm <sup>2</sup> / AWG 28 ... 12, Terminal block width 6 mm / 0.236 in. gray <b>281-916</b> 50		<b>3-conductor carrier terminal block,</b> ② 0.08 ... 4 mm <sup>2</sup> / AWG 28 ... 12, Terminal block width 6 mm / 0.236 in. gray <b>281-610</b> 50	
<b>End and intermediate plate, 2.5 mm thick</b> orange <b>281-329</b> 100 (4x25) gray <b>281-328</b> 100 (4x25)		<b>End and intermediate plate, 2.5 mm thick</b> orange <b>281-326</b> 100 (4x25) gray <b>281-324</b> 100 (4x25)	
<b>Wire commoning chain, 50 connections,</b> insulated, I <sub>N</sub> 8 A black <b>210-103</b> 1		<b>Wire commoning chain, 50 connections,</b> insulated, I <sub>N</sub> 8 A blue <b>210-123</b> 1	