
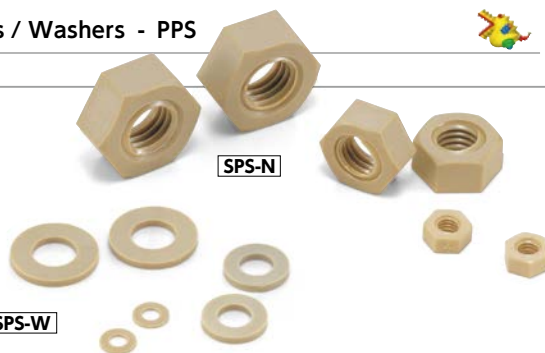



**SPS-N/SPS-W** Plastic Screw - Hex Nuts / Washers - PPS

WEB Selection Tool    WEB CAD Download    Heat-resistance    Chemical-proof

**SPS-N****SPS-W****SPS-W**

- Material/Finish ● RoHS Compliant

<b>SPS-N / SPS-W</b>	
Main body	PPS (Polyphenylene Sulfide) / Bright Light Brown Glass Fiber 40%
Heat Resistance Temperature*	200°C

\*This is the value for the plastic material. The maximum operating temperature of the product changes with performance conditions such as tightening torque.

- PPS has excellent heat resistance and chemical resistance and continuous duty temperature of 200 deg C. Under 200 deg C, no oils, fats, or organic solvents dissolve PPS.
- It has high strength, high rigidity, and high heat resistance strength.
- It has high incombustibility that meets V-0 of UL 94.
- The properties and precautions of plastic screws → P.724
- Application

FPD production equipment, semiconductor devices, printed circuit board etching devices, metallic surface treatment equipment and facilities, chemical plants, transformers, electrical and electronic equipment, hot water pumps, and chemical pumps

**SPS-N** Hex Nuts

Unit : mm

Part Number	M	B	T	Mass (g)	Qty per pack*1
<b>SPS-M2-N</b>	M2	4	1.6	0.026	20
<b>SPS-M2.6-N</b>	M2.6	5	2	0.05	20
<b>SPS-M3-N</b>	M3	5.5	2.4	0.07	20
<b>SPS-M4-N</b>	M4	7	3.2	0.17	20
<b>SPS-M5-N</b>	M5	8	4	0.25	20
<b>SPS-M6-N</b>	M6	10	5	0.52	10
<b>SPS-M8-N</b>	M8	13	6.5	1.2	10
<b>SPS-M10-N</b>	M10	17	8	2.4	5
<b>SPS-M12-N</b>	M12	19	10	3.5	5

\*1 The minimum order quantity is 1 piece. → P.794

**SPS-W** Washers

Unit : mm

Part Number	d	D	t	Nominal	Mass (g)	Qty per pack*1
<b>SPS-3-W</b>	3.2	7	0.5	3	0.025	20
<b>SPS-4-W</b>	4.3	9	0.8	4	0.065	20
<b>SPS-5-W</b>	5.3	10	1	5	0.094	20
<b>SPS-6-W</b>	6.4	12.5	1.6	6	0.24	10
<b>SPS-8-W</b>	8.4	17	1.6	8	0.46	10
<b>SPS-10-W</b>	10.5	21	2	10	0.86	5
<b>SPS-12-W</b>	13	24	2.5	12	1.3	5

\*1 The minimum order quantity is 1 piece. → P.794

- Part number specification

**SPS-M5-N**

Order in number of packs.  
The minimum order quantity is 1 piece. → P.794

Individual Sales → P.794	Cleanroom Wash & Packaging → P.792	Screw Length Adjustment → P.796	Vibration Resistant → P.795	Modification process for captive use → P.791
Available / Add'l charge	Available / Add'l charge	Not Available	Not Available	Not Available