


# SPC-N / SPC-W Plastic Screw - Hex Nuts / Washers - PC



WEB Selection Tool    WEB CAD Download

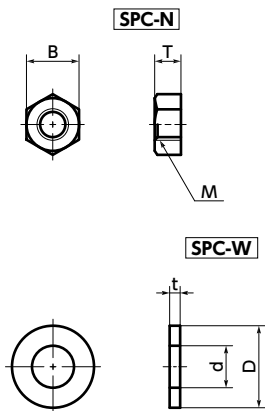

- PC (polycarbonate) has the highest shock resistance of engineering plastics.
- Max. Operating Temperature\* (min./max.): -40/115 deg C
- PC has low water absorbency and excellent weather resistance.
- The properties and precautions of plastic screws → P.724

### ● Application

Electrical and electronic equipment and automobiles

### ● Material/Finish

RoHS Compliant

	SPC-N / SPC-W
Main body	PC (Polycarbonate)
Heat Resistance Temperature*	115°C

\*This is the value for the plastic material. The maximum operating temperature of the product changes with performance conditions such as tightening torque.

### SPC-N Hex Nuts

Unit : mm

Part Number	M	B	T	Mass (g)	Qty per pack*1
<b>SPC-M2-N</b>	M2	4	1.6	0.019	50
<b>SPC-M3-N</b>	M3	5.5	2.4	0.052	50
<b>SPC-M4-N</b>	M4	7	3.2	0.12	50
<b>SPC-M5-N</b>	M5	8	4	0.18	50
<b>SPC-M6-N</b>	M6	10	5	0.37	20

\*1 The minimum order quantity is 1 piece. → P.794

### SPC-W Washers

Unit : mm

Part Number	d	D	t	Nominal	Mass (g)	Qty per pack*1
<b>SPC-2-W</b>	2.1	4	0.5	2	0.0055	100
<b>SPC-3-W</b>	3.3	8	0.8	3	0.04	100
<b>SPC-4-W</b>	4.5	10	0.8	4	0.06	100
<b>SPC-5-W</b>	5.5	12	0.8	5	0.086	100
<b>SPC-6-W</b>	6.5	13	1	6	0.12	50

\*1 The minimum order quantity is 1 piece. → P.794

### ● Part number specification

## SPC-M4-N



Order in number of packs.  
The minimum order quantity is 1 piece. → P.794

Individual Sales → P.794	Cleanroom Wash & Packaging → P.792	Screw Length Adjustment → P.796	Vibration Resistant → P.795	Modification process for captive use → P.791
Available / Add'l charge	Available / Add'l charge	Not Available	Not Available	Not Available