


銅線用 絶縁被覆付圧着端子 (Y形)先開形 TMEV : ポリ塩化ビニル

B

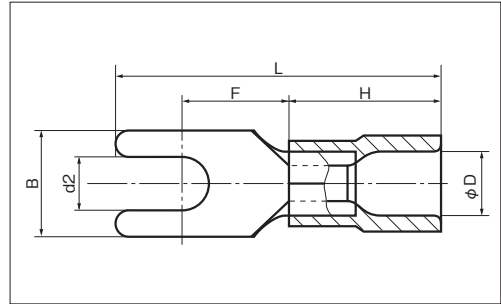

品番	各部の寸法 mm					電線抱合範囲		適用工具		標準色	包装個数								
	d2	B	L	F	H	φD	燃線mm ²	AWG	手動工具 本体			ヘッド							
TMEV 0.3Y-2	2.2	5.2	17.5	4.9	10.0	2.8	0.2-0.5 0.3-0.5 UL・CSA 指定	24-20 22-20 UL・CSA 指定	NH 5 NH 32 NH 60	黄	1,000 (100×10)								
TMEV 0.3Y-3	3.2																		
TMEV 0.3Y-3.5N	3.7											20.5	5.8						
TMEV 0.3Y-4N	4.3												6.6						
TMEV 0.3Y-5	5.3											8.0	21.0	7.0					
TMEV 1.25Y-2.5	2.7	4.7	17.2	5.1	10.0	4.1	0.3 ∩ 1.65	22-16	NH 11 NH 32	赤	1,000 (100×10)								
TMEV 1.25Y-3K	3.2	5.6	20.5	5.8															
TMEV 1.25Y-3S		5.7	17.4	4.8															
TMEV 1.25Y-3		5.8	20.5	5.8															
TMEV 1.25Y-3N	21.5		6.6																
TMEV 1.25Y-3.5K	3.7	5.6	20.5	5.8															
TMEV 1.25Y-3.5		5.8																	
TMEV 1.25Y-3L		6.2	21.5	6.8															
TMEV 1.25Y-4N	4.3	6.4	21.9	6.6															
TMEV 1.25Y-4S		7.0		7.6															
TMEV 1.25Y-4M		8.1		7.5															
TMEV 1.25Y-4L		9.6		23.0								8.3							
TMEV 1.25Y-5	5.3																		
TMEV 1.25Y-6	6.4	11.0	24.5	8.6								NA 10 NA 3	N10 11 N3 11						
TMEV 2Y-3	3.2	5.9	21.3	6.6								10.0	4.5	1.04 ∩ 2.63	16-14	NH 12 NH 32	青	1,000 (100×10)	
TMEV 2Y-3.5S	3.7	5.8																	
TMEV 2Y-3.5		6.4			7.6														
TMEV 2Y-3.5L					6.6														
TMEV 2Y-4N	4.3	7.0			21.5	7.0													
TMEV 2Y-4S		8.0	7.1																
TMEV 2Y-4		10.0	22.6	8.7															
TMEV 2Y-4M		5.3	8.0	21.5	7.1														
TMEV 2Y-5	10.0		22.6	8.7															
TMEV 2Y-5M	12.0		23.5	8.5															
TMEV 2Y-5L		25.5	8.6																
TMEV 2Y-6	6.4	14.0	27.5	11.5	NA 10 NA 3	N10 12 N3 12													
TMEV 3.5Y-4	4.3	8.0	26.0	7.2	14.0	6.3	2.63 ∩ 4.6	12	NH 13 NA 10 NA 3	N10 13 N3 13	黄								100
TMEV 3.5Y-5	5.3	9.5	28.0	8.3															
TMEV 3.5Y-6	6.4	12.0	30.0	9.8															
TMEV 5.5Y-4S	4.3	8.4	25.7	7.2	14.0	6.8	2.63 ∩ 6.64	12-10	NH 13 NA 10 NA 3	N10 13 N3 13	黄	100							
TMEV 5.5Y-4		9.0																	
TMEV 5.5Y-5		5.2											9.0						
TMEV 5.5Y-6	6.4	12.5	32.7	12.0															

注1) ○ : UL・CSA登録品

2) UL・CSA登録品 絶縁体の材質・色 電線被覆ムキ寸法 についてはP33をご覧ください。

3) 先開形 1.25Y-3Sの接触部形状は右図の丸形となります。

4) TMEV (ポリ塩化ビニル) 端子は標準色以外に透明色がございます。

