

平凸レンズ(合成石英):S61

ホルダチョイス




P.3-029, 097~

RoHS 納期 問合せ ください



合成石英製の平凸レンズです。紫外域の透過率に優れた特性を持っています。反射防止膜付はありません。

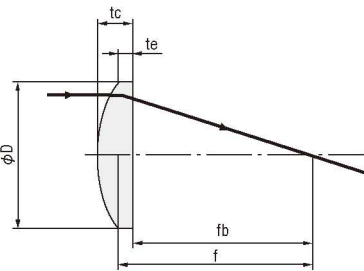

SPEC							
型式	価格	φD(mm)	f(mm)	fb(mm)	tc(mm)	te(mm)	
S61-10-20	¥9,000	10	20	18.1	2.8	1.44	
S61-10-30	¥9,000		30	28.4	2.4	1.53	
S61-10-40	¥9,000		40	38.5	2.2	1.56	
S61-10-50	¥8,000		50	48.6	2.0	1.49	
S61-10-60	¥8,000		60	58.6	2.0	1.58	
S61-10-70	¥8,000		70	68.7	1.9	1.54	
S61-10-80	¥8,000		80	78.7	1.9	1.59	
S61-10-90	¥8,000		90	88.7	1.9	1.62	
S61-10-100	¥8,000		100	98.7	1.9	1.64	
S61-20-30	¥9,500		20	30	25.8	6.1	1.99
S61-20-40	¥9,500	40		36.4	5.3	2.46	
S61-20-50	¥9,100	50		46.7	4.5	2.30	
S61-20-60	¥9,100	60		57.2	4.0	2.20	
S61-20-70	¥9,100	70		67.5	3.6	2.06	
S61-20-80	¥9,100	80		77.6	3.5	2.17	
S61-20-90	¥9,100	90		87.7	3.4	2.22	
S61-20-100	¥9,100	100		97.7	3.3	2.24	
S61-30-40	¥11,000	30		40	33.3	9.8	2.29
S61-30-50	¥11,000			50	44.8	7.6	2.18
S61-30-60	¥11,000		60	55.5	6.5	2.17	
S61-30-70	¥11,000		70	65.9	5.9	2.28	
S61-30-80	¥11,000		80	76.3	5.4	2.28	
S61-30-90	¥11,000		90	86.6	4.9	2.15	
S61-30-100	¥10,000		100	96.7	4.7	2.24	
S61-50-70	¥23,000	50	70	59.65	15.12	3.40	
S61-50-80	¥22,500		80	71.05	13.06	3.40	
S61-50-90	¥22,000		90	81.97	11.70	3.49	
S61-50-100	¥21,500		100	92.67	10.70	3.41	
S61-50-150	¥21,500		150	144.48	8.05	3.46	
S61-50-200	¥21,500		200	195.32	6.82	3.40	
S61-50-300	¥21,500		300	296.13	5.66	3.40	

- 光学素子
- ガイドンス
- ミラー
- レンズ
- 偏光素子
- ビームスプリッタ
- プリズム
- 基板
- ダイクロイック
- フィルタ
- ピンホール

両凸レンズ(合成石英):S62


ホルダチョイス



P.3-029, 097~

RoHS 納期 問合せ ください

合成石英製両凸レンズです。平凸レンズよりも焦点距離を短くすることができます。紫外域の透過率に優れた特性を持っています。反射防止膜付はありません。

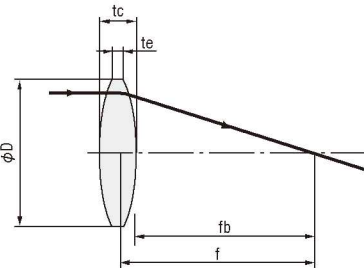

SPEC							
型式	価格	φD(mm)	f(mm)	fb(mm)	tc(mm)	te(mm)	
S62-10-10	¥10,000	10	10	8.46	4.3	1.30	
S62-10-15	¥10,000		15	13.93	3.0	1.20	
S62-10-20	¥9,200		20	19.13	2.5	1.19	
S62-10-30	¥8,000		30	29.31	2.0	1.14	
S62-10-40	¥7,900		40	39.20	2.0	1.36	
S62-10-50	¥7,900		50	49.31	2.0	1.49	
S62-20-20	¥13,000	20	20	17.00	8.2	1.98	
S62-20-30	¥10,500		30	28.00	5.6	1.85	
S62-20-40	¥10,500		40	38.40	4.6	1.87	
S62-20-50	¥10,000		50	48.58	4.1	1.95	
S62-20-60	¥9,900		60	58.61	4.0	2.22	
S62-20-70	¥9,500		70	68.76	3.6	2.08	
S62-20-80	¥9,500		80	78.79	3.5	2.17	
S62-20-100	¥9,500		100	98.86	3.3	2.24	
S62-30-30	¥15,500		30	30	25.64	11.8	2.33
S62-30-40	¥14,500			40	36.95	8.7	2.19
S62-30-50	¥13,500	50		47.53	7.2	2.16	
S62-30-60	¥13,000	60		57.80	6.3	2.16	
S62-30-70	¥12,500	70		68.02	5.7	2.18	
S62-30-80	¥12,500	80		78.21	5.2	2.14	
S62-30-90	¥12,000	90		88.34	4.8	2.09	
S62-30-100	¥12,000	100		98.44	4.5	2.07	
S62-30-200	¥12,000	200		198.86	3.3	2.10	
S62-30-300	¥12,000	300		299.00	2.8	2.00	
S62-50-50	¥28,000	50	50	43.08	18.9	2.16	
S62-50-60	¥24,000		60	54.45	15.6	3.25	
S62-50-70	¥25,000		70	65.2	13.6	3.33	
S62-50-80	¥25,500		80	75.81	12.0	3.19	
S62-50-90	¥25,000		90	86.19	11.0	3.26	
S62-50-100	¥24,000		100	96.52	10.0	3.09	
S62-50-150	¥24,000		150	147.39	7.6	3.09	
S62-50-200	¥24,000		200	197.82	6.4	3.04	
S62-50-300	¥24,000		300	298.19	5.3	3.07	

■ 共通仕様 (S61, S62)

材質	合成石英※
外径公差(直径)φD	+0 -0.1mm
中心厚公差tc	±0.2mm
焦点距離公差f	±2%
偏芯	3分以内
設計波長	587.6nm
屈折率	1.4585(λ=587.6nm)

※透過率特性 ▶ P.3-069 S02, S04