

Sun Paint Tube (P)

Superior in flexibility by using solvent resistant urethane resin for the outer layer. This tube is designed to improve the workability of painting processes.

Specifications: Working temperature limit: Between -20°C and + 60°C

Nominal designation	Inner diameter (mm)	Outer diameter (mm)	Regular size (m)	Maximum working pressure	Burst pressure	Minimum bending radius (mm)	Regular size weight (kg)
				MPa at 20°C	MPa at 20°C		
P-7	7.0	10.0	100	0.5	2.3	45	5.1



Polyamide/Polyurethane resin product

[P Structure]



Usege Piping for paints and solvents

Features Reduces the load of workers.

Fluids Paints Solvents

Sun Paint Hose (PB-easy)

With the use of polyamide resin, the solvent resistance is significantly improved compared to conventional painting hoses.


Specifications: Working temperature limit: Between -20°C and + 60°C

Nominal designation	Inner diameter (mm)	Outer diameter (mm)	Regular size (m)	Maximum working pressure	Burst pressure	Minimum bending radius (mm)	Regular size weight (kg)
				MPa at 20°C	MPa at 20°C		
PB-easy-7	6.5	10.0	100	1.5	7.2	35	5.7



Polyamide/Polyurethane resin product

[EASY Structure]

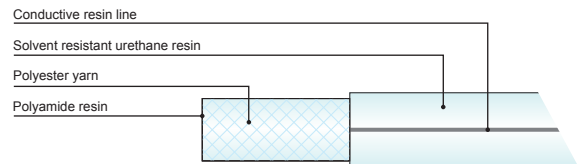

Usege For piping of paints and solvents

Features Superior in flexibility and pressure resistance, this hose will improve the workability.

Fluids Paints Solvents

Features

A versatile painting hose is now available!

- As a conductive sleeve is applied around the outer layer, the grounding can be completed just by tightening the metallic joint (when the resistance value is $9 \times 10^6 \text{ W}$ or less, and the whole length is 15m or less).

Sun Paint Hose (PB-with a ground wire)

With the use of polyamide resin, the solvent resistance is significantly improved compared to conventional painting hoses.


Specifications: Working temperature limit: Between -20°C and + 60°C

Nominal designation	Inner diameter (mm)	Outer diameter (mm)	Regular size (m)	Maximum working pressure	Minimum bending radius (mm)	Regular size weight (kg)
				MPa at 20°C		
PB-7	6.5	10.0	100	1.5	35	5.7



Polyamide/Polyurethane resin product

[EASY Structure]

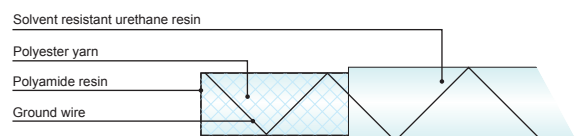

Usege For piping of paints and solvents

Features Superior in flexibility and pressure resistance, this hose will improve the workability.

Fluids Paints Solvents