
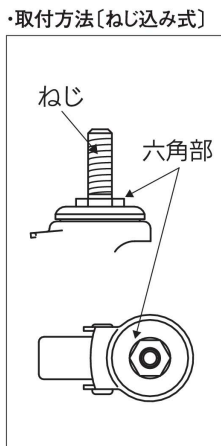


# LT-S型 φ40 50 65 75

自在車	固定車
プレート式	ねじ込み式 差し込み式
三価ユニクロ仕上	クロームメッキ仕上
シングルベアリング	ダブルベアリング
シングルストッパー	ダブルストッパー

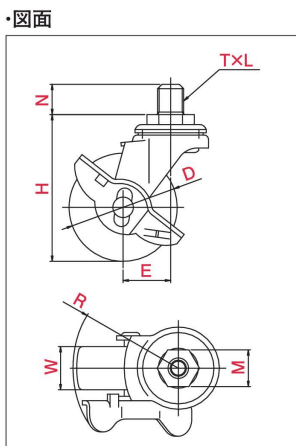

※写真は代表的な製品イメージです。

品番	車輪	車輪径 D (mm)	車幅 W (mm)	取付高 H (mm)	ねじ T	ピッチ・山数 L	長さ N (mm)	対辺 M (mm)	偏心 E (mm)	旋回半径 R (mm)	許容荷重 [daN (kgf)]		
LT-40RS, M12×14	ホイルゴム車輪	40	17	59	M12	1.25	14	19	21	50	25 (25.5)		
LT-40RS, UNF1/2×14					UNF1/2	20		21					
LT-40RS, W3/8×14					W3/8	16		17					
LT-50RS, M12×14		50	20	68	M12	1.25	14	19	22	49			
LT-50RS, UNF1/2×14					UNF1/2	20		21					
LT-50RS, W3/8×14					W3/8	16		17					
LT-65RHS, M12×14		65	21	85	M12	1.25	35	19	23	57		30 (30.6)	
LT-65RHS, M12×35					M12	1.75		35					19
LT-65RHS, UNF1/2×14					UNF1/2	20		21					
LT-65RHS, W3/8×14		75	21	95	W3/8	16	14	17	27	65			
LT-75RHS, M12×14					M12	1.25		19					
LT-75RHS, M12×35					M12	1.75		35				19	
LT-75RHS, UNF1/2×14	75	21	95	UNF1/2	20	14	21	27	65	40 (40.8)			
LT-75RHS, W3/8×14				W3/8	16		17						
LT-40NS, M12×14				ホイルナイロン車輪/アイロン	40		18				59	M12	1.25
LT-40NS, UNF1/2×14	UNF1/2	20	21										
LT-40NS, W3/8×14	W3/8	16	17										
LT-50NS, M12×14	50	21	68		M12	1.25	14	19	22	49			
LT-50NS, UNF1/2×14					UNF1/2	20		21					
LT-50NS, W3/8×14					W3/8	16		17					
LT-65NS, M12×14	65	21	85		M12	1.25	35	19	23	57	40 (40.8)		
LT-65NS, M12×35					M12	1.75		35				19	
LT-65NS, UNF1/2×14					UNF1/2	20		21					
LT-65NS, W3/8×14	75	21	95		W3/8	16	14	17	27	65	35 (35.7)		
LT-75NS, M12×14					M12	1.25		19					
LT-75NS, M12×35					M12	1.75		35				19	
LT-75NS, UNF1/2×14	75	21	95	UNF1/2	20	14	21	27	65	50 (51.0)			
LT-75NS, W3/8×14				W3/8	16		17						

・専用工具 17平スパナ ユーエイスパナ (19mm/21mm)

軽荷重向け  
中荷重向け  
重荷重向け  
事務機器向け  
低床向け  
台車固定機能  
衝撃吸収機構付  
低騒音仕様  
けん引向け  
ステンレス仕様