RoHS10

EMACN

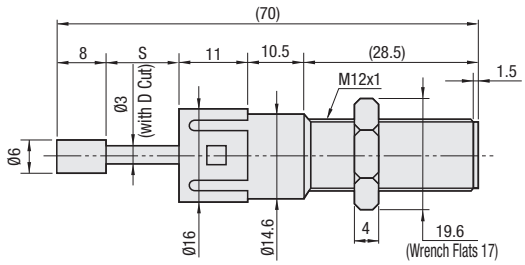

Operating Temp. Range : -10 ~ 50°C
Durability : 500,000 times
Collision Velocity Range : No.1212A, B, C :0.3~1.0 m/s
No.1212D :0.1~0.7 m/s
No.1212E :0.1~0.5 m/s
Max. Tightening Torque : 1.5N・m
(When shouldering to Ø14.6, tighten up at 1.0N/m.)

Parts	M Material	S Surface Treatment
Main Body	PPS	-
Cap	POM	
Piston Rod	C3604	Electroless Nickel Plating

A Accessory: Nut <Opposite Angle 19.6, Opposite Side17>

Part Number		Cap Color	Thread Dia. M	Stroke S	Max. Absorbed Energy (E')		Max. Equivalent Mass (me') (kg)	Piston Rod Return Force (N)	Max. Drag Value (N)	Unit Price	Volume Discount Rate
Type	No.				per Impact (J)	per Minute (J)				1 ~ 4 pc(s).	5 ~ 10 pcs.
EMACN	1212A	White	M12x1	12	0.29	14.7	1.5	2.45	245		
	1212B	Black			0.49		3.0		294		
	1212C	Yellow			1.0	5.0	5.0				
	1212D	Green					7.5				
	1212E	Red					10.0				

Ordering Example

Part Number
EMACN1212A