


Note that, for some of the types shown here, order might be unable to be received by the MISUMI Malaysia, and/or Indonesia offices.

Extruded Brackets - For 2 Slots

For 6 Series (Slot Width 8mm) Aluminum Extrusions



Features: Extruded Brackets to connect 2-slot extrusions (HFS6-6060, etc.).

Thick Brackets




NBLTD6
HBLTD6
HBLTD66
(Black Anodize)
CHBLTD6
(Clear Coating)

For 50 Sq.

HBLTD6-50

Type	Material	Surface Treatment
NBLTD6	A6063S-T5	Anodize
HBLTD6(-50)	A6N01SS-T5	Black Anodize
HBLTD66		Clear Coating Anodize + Clear Paint
CHBLTD6	A6N01SS-T5	Clear Coating Anodize + Clear Paint

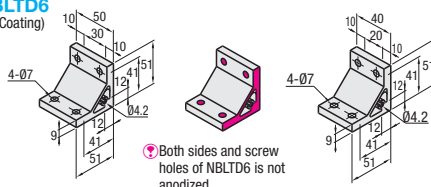

Both sides and screw holes of NBLTD6 is not anodized.

Part Number	Mass (g)	Applicable Screw, T Nut				Allowable Load (N)	Unit Price (1-99 pcs)	Volume Discount Rate (100-200)
		Screw	Quantity	T Nut	Quantity			
NBLTD6	111	CBM6-15	4	HNTT6-6	4	1960		
HBLTD6								
HBLTD66* (Black Anodize)								
CHBLTD6 (Clear Coating)								
HBLTD6-50	88							

* For repairing black anodizing, refer to P846.

Features: Numbers of screws are the same as HBLTD6. Extrusions can be connected more securely.

Ultra Thick Brackets




HBLUD6
HBLUD66
(Black Anodize)

For 50 Sq.

HBLUD6-50

Type	Material	Surface Treatment
HBLUD6	A6N01SS-T5	Anodize
HBLUD66		Black Anodize
HBLUD6-50		Anodize

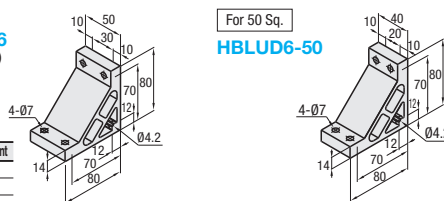


Part Number	Mass (g)	Applicable Screw, T Nut				Allowable Load (N)	Unit Price (1-99 pcs)	Volume Discount Rate (100-200)
		Screw	Quantity	T Nut	Quantity			
HBLUD6	256	CBM6-20	4	HNTT6-6	4	1960		
HBLUD66* (Black Anodize)								
HBLUD6-50	211	CBM6-20						

* For repairing black anodizing, refer to P846.


Features: Brackets for 2-slot extrusions with 4 mounting holes on one side can connect extrusions more securely.

Thick Brackets


Triangle Brackets



HBLDDW6
(Without Tab)



Example

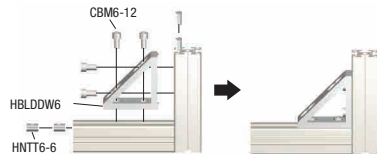

Material: A6N01SS-T5 Surface Treatment: Anodize

Part Number	Mass (g)	Applicable Screw, T Nut				Allowable Load (N)	Unit Price (1-99 pcs)	Volume Discount Rate (100-200)
		Screw	Quantity	T Nut	Quantity			
HBLTDW6	192	CBM6-15	8	HNTT6-6	8	2940		
HBLDDW6	190	CBM6-12	8	HNTT6-6	8	2940		



Alterations	Code	Spec.	Applicable Bracket
Mounting Hole Alteration for Cover	C	Adds taps on a bracket for cover mounting. (M5 on Both Sides) (Mounting Screw HCBM on P754)	NBLTD6
			HBLTD6
			CHBLTD6
			HBLTD6-50
			HBLUD6
			HBLUD6-50
			HBLTDW6

Alterations	Code	Spec.	Applicable Bracket	
Applicable Screws and Nuts Set	SET	Applicable screws and nuts for fixing the brackets on extrusions come in a set. (Adds to the bracket price.) (Ex.) When HBLTD6 is specified: Code Screw Nut SET CBM6-15 HNTT6-6 SST SCB6-15 HNTT6-6 SEU CBM6-15 HNTT6-6 SSU SCB6-15 SHNTT6-6 SEP CBM6-15 HNTT6-6 SSP SCB6-15 SHNTT6-6 SEC HCBST6-20 HNTT6-6	NBLTD6	
	SST		HBLTD6	
	SEU		HBLTD66	
	SSU		CHBLTD6	
	SEP		HBLTD6-50	
	SSP		HBLUD6	
	SEC		HBLUD66	
			HBLUD6-50	
			HBLTDW6	
			HBLDDW6	

* Screws for black anodized brackets are HCBMTB (Trivalent Chromate Black) on P751.

* Included Screw is not RoHS compliant when -SET, -SEU or -SEP other than black anodized brackets is specified.