


Product name

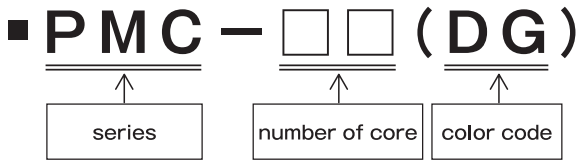

Sheath color

■ Polish Dark Grey Color Code : DG

Line-up

product name	number	pair	conductor		PVC insulation		shield	PVC sheath		allowable ampacity (A)
			structure AWG size	diameter (mm)	thickness (mm)	diameter (mm)		thickness (mm)	diameter (mm)	
PMC-2(DG)	2	1P	30/0.08 bare copper AWG26 (0.15mm ²)	Approx. 0.51	PVC Approx. 0.3	1.1	/		4.0	2.3
PMC-4(DG)	4	2P							5.2	1.8
PMC-6(DG)	6	3P							5.2	1.5
PMC-8(DG)	8	4P							5.8	1.3
PMC-10(DG)	10	5P							6.7	1.2
PMC-12(DG)	12	6P							6.9	1.0
PMC-14(DG)	14	7P							7.2	1.0
PMC-24(DG)	24	12P							9.0	0.8
PMC-30(DG)	30	15P							10.2	0.8
PMC-36(DG)	36	18P							10.6	0.7
PMC-50(DG)	50	25P							11.5	0.6
PMC-60(DG)	60	30P							12.8	0.6
PMC-64(DG)	64	32P							13.5	0.5

※The current carrying capacities is a calculation value at 30°C
 ※Please inquire of sales staff about stock,date for delivery.

Standard length

■ 100m



Insulation color

Pair No.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20																							
Core No.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40			
Insulation color	Blue	Orange	Green	Brown	Grey	Red	Black	Yellow	Pink	Purple	White	Blue	Orange	Green	Brown	Grey	Red	Black	Yellow	Pink	Purple	White	Blue	Orange	Green	Brown	Grey	Red	Black	Yellow	Pink	Purple	White	Blue	Orange	Green	Brown	Grey	Red	Black	Yellow		
Marking color	-	-	-	-	-	-	-	-	-	-	-	Red	White	White	White	White	White	White	Black	Black	White	Blue	Red	White	White	White	White	White	White	Black	Black	White	Blue	Black	Black	Black	Black	Black	Black	Black	Black	Red	Yellow
Marking No.	-	-	-	-	-	-	-	-	-	-	-	1	1	1	1	1	1	1	1	1	1	1	2	2	2	2	2	2	2	2	2	2	1	1	1	1	1	1	1	1	1	1	1

Pair No.	21	22	23	24	25	26	27	28	29	30	31	32												
Core No.	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64
Insulation color	Pink	Purple	White	Blue	Orange	Green	Brown	Grey	Red	Yellow	Pink	Purple	White	Blue	Orange	Green	Brown	Grey	Red	Yellow	Pink	Purple	White	Blue
Marking color	Red	Black	Black	Black	Black	Black	Black	Black	Black	Red	Red	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Blue	Yellow	Yellow	Yellow	Yellow	Orange
Marking No.	1	1	1	2	2	2	2	2	2	2	2	1	1	1	1	1	1	1	1	1	1	1	2	

PEE/ETFE-Insulated robot cable series
 Globally compliant power cable series
 Twisted-pair cable series
 AWG22 cable series
 Modular cables
 Photovoltaic power system cables
 Special-purpose cables
 Technical data