

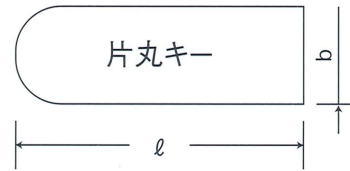
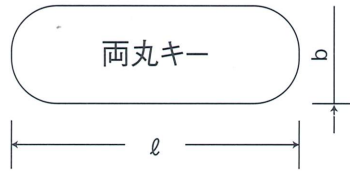


JISキー寸法公差表

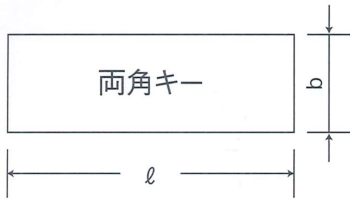

JIS B 1301規格 (SEIKIマシンキー)						参考 旧 JIS規格																	
キーの呼び寸法 b x h	適応する軸径 φ	b		h		C	キーの呼び寸法 b x h	適応する軸径 φ	1 種				2 種										
		基準寸法	許容差 (h9)	基準寸法	許容差				基準寸法	許容差 (p7)	基準寸法	許容差 (h9)	C	基準寸法	許容差 (h8)	基準寸法	許容差 (h10)	C					
2x2	6~8	2	0	2	0	0.16 ~ 0.25	4x4	10~13	4	+0.024	4	0	0.5	4	0	4	0	0.5					
3x3	8~10	3	-0.025	3	-0.025		5x5	13~20	5	+0.012	5	-0.030		5	-0.018	5	-0.048						
4x4	10~12	4	0	4	0		7x7	20~30	7	+0.030	7	0		7	0	7	0						
5x5	12~17	5		-0.030		5	-0.030	10x8	30~40	10	+0.015		8	-0.036		10		-0.022	8	-0.058			
6x6	17~22	6	0	6	0	12x8	40~50	12	+0.036	8	+0.018	10	0	12	0	8	0						
(7x7)	20~25	7		-0.036		7	-0.036	15x10		50~60		15		+0.018		10		-0.027	10	-0.027	10	-0.027	
8x7	22~30	8		-0.036		7	-0.036	18x12		60~70		18				12			18		12		
10x8	30~38	10	0	8	0	20x13	70~80	20	+0.043	13	+0.022	1.2	0	20	0	13	0						
12x8	38~44	12		-0.043		8	-0.043	24x16		80~95		24		+0.022		16		-0.033	16	-0.033	16	-0.070	
14x9	44~50	14		-0.043		9	-0.090	28x18		95~110		28				18			28		18		
(15x10)	50~55	15	0	10	0	32x20	110~125	32	+0.051	20	+0.026	2	0	32	0	20	0						
16x10	50~58	16		-0.043		10	-0.043	35x22		125~140		35		+0.026		22		-0.052	35	-0.039	22	-0.084	
18x11	58~65	18		-0.043		11	-0.11	38x24		140~160		38				24			38		24		
20x12	65~75	20	0	12	0	42x26	160~180	42	+0.062	26	+0.032	3	0	42	0	26	0						
22x14	75~85	22		-0.052		14	-0.11	45x28		180~200		45		+0.032		28		-0.062	45	-0.046	28	-0.100	
24x16	80~90	24		-0.052		16	-0.11	50x31.5		200~224		50				31.5			50		31.5		
25x14	85~95	25	0	14	0	56x35.5	224~250	56	+0.062	35.5	+0.032	3	0	56	0	35.5	0						
28x16	95~110	28		-0.062		16	-0.13	63x40		250~280				63		+0.032		40	-0.062	63	-0.046	40	-0.100
32x18	110~130	32		-0.062		18	-0.13	71x45		280~315				71				45		71		45	
(35x22)	125~140	35	0	22	0	80x50	315~355	80	+0.072	50	+0.037	3	0	80	0	50	0						
36x20	130~150	36		-0.062		20	-0.13	90x56		355~400				90		+0.037		56	-0.074	90	-0.054	56	-0.120
(38x24)	140~160	38		-0.062		24	-0.13	100x63		400~450				100		+0.037		63	-0.074	100	-0.054	63	-0.120
40x22	150~170	40	0	22	0	112x71	450~500	112		71		3	0	112	0	71	0						
(42x26)	160~180	42		-0.062		26	-0.13																
45x25	170~200	45		-0.062		25	-0.13																
50x28	200~230	50	0	28	0							3	0		0		0						
56x32	230~260	56		-0.074		32	-0.16																
63x32	260~290	63		-0.074		32	-0.16																