


# Shaft Supports Bottom Mount Set Screw (Machined)

## Standard / Wide



Type	Material	Surface Treatment	Accessory
SHSC	S45C Equivalent	Black Oxide	Hex Socket Set Screw 1 pc.
SHBM	S45C Equivalent	Electroless Nickel Plating	Hex Socket Set Screw 1 pc. (SUS)
SHSB		SUS304	
SHSA	Aluminum Alloy	Clear Anodize	

25 / ( 63 / 15 / )

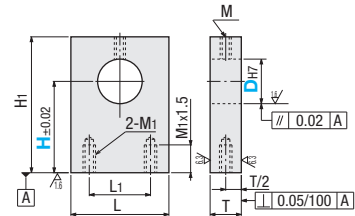

Part Number Type	D	H Selection				L	H1	T	L1	Set Screw M	M1	Unit Price			
		SHSC	SHBM	SHSB	SHSA										
SHSC SHBM SHSB SHSA	8	15	20	25	30	16	H+9	12	10	M4	M4				
	10	20	25	30	H+10		H+11								
	12	20	25	30	H+12		H+15								
	13	20	25	30	22	16	(15)		14	M6	M6				
	15	25	30	40								H+18	H+20		
	16	25	30	40								H+23	H+25		
	18	25	30	40	50	32	50	22	18	M6	M8				
	20	25	30	40	50							H+30			
	25	30	40	50											
	30	30	40	50	60	50	60	22	24	M6	M8				
	35	40	50	60											
	40	40	50	60											


Values in ( ) are the T dimensions of SHSA (Aluminum).



Type	Material	Surface Treatment	Accessory
SHSCN	S45C Equivalent	Black Oxide	Hex Socket Set Screw 1 pc.
SHBMN	S45C Equivalent	Electroless Nickel Plating	Hex Socket Set Screw 1 pc. (SUS)

D dimensions 30 ~ 40 come with 2 screws.

25 / ( 63 / 15 / )

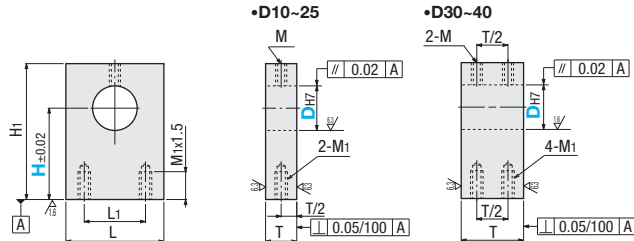

Part Number Type	D	H Selection				L	H1	T	L1	Set Screw M	M1	Unit Price	
		SHSCN	SHBMN										
SHSCN SHBMN	10	20	25	30	22	H+10	18	12	M6	M6			
	12	20	25	30		H+11							
	16	25	30	40	25	H+15	20	14	M8	M8			
	20	25	30	40		50					H+18		
	25	30	40	50	38	H+20	30	24	M8	M8			
	30	30	40	50		60					H+23		
	35	40	50	60	50	H+25	35	32	M8	M8			
	40	40	50	60		H+30							
	40	40	50	60									

Ordering Example	Part Number	H
	SHBM16	25
	SHSCN20	30

Alterations	Part Number	HC
	SHBM16	HC35.6
	SHSB20	HC41.5

Alterations are not available for Stocked Items - Wide Type. Express Service is not available.

Alteration	Code	Spec.
Mounting Height	HC	Changes shaft mounting height. Change H to HC to specify height. Specify HC in 0.1mm increments. Specifiable Range Hmin. < HC < Hmax. Ordering Code HC35.6