



Air Blow Nozzles

RoHS 10





	Threaded and Tapped	Height Adjusting Threaded, Tapped	Strut Clamp Mounting	2-Core Threaded	Barbed Coupler	Hose Nipple	Material	Hardness
L Fixed	ABNZH	ABNML	ABNZS	ABNKH	ABNZT	ABNZP	Main Body, Pipe SUS304	HV200 or Less
L Configurable	ABNZHL	ABNMLL	ABNZSL	ABNXH	ABNZTL	ABNZPL		


• Threaded, Tapped **ABNZH** (L Fixed) **ABNZHL** (L Configurable) • Height Adjusting Threaded, Tapped **ABNML** (L Fixed) **ABNMLL** (L Configurable)




• Strut Clamp Mounting Type **ABNZS** (L Fixed) **ABNZSL** (L Configurable) (When Nominal =5) (When Nominal =1)

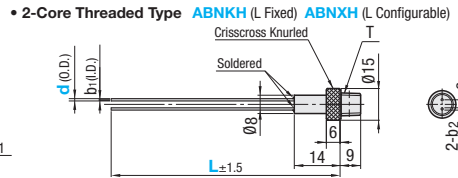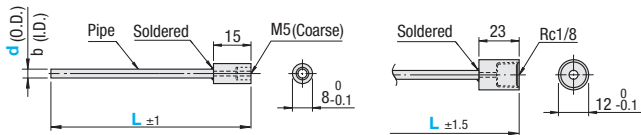

• Barbed Coupler Type **ABNZT** (L Fixed) **ABNZTL** (L Configurable)

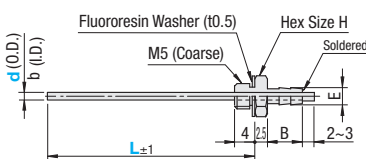

• Hose Nipple Type **ABNZP** (L Fixed) **ABNZPL** (L Configurable)

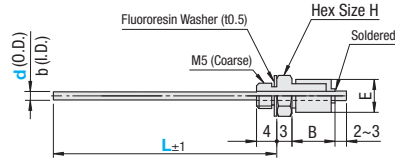

■ Threaded and Tapped ■ Height Adjusting Threaded, Tapped ■ Strut Clamp Mounting

Part Number	Type	Nominal	d	L		b	L Dimension Fixed	Unit Price	L Dimension Configurable	Unit Price
				L Fixed	L 1mm Increment					
(L Fixed)	ABNZH	5	1.0	100	20-99	0.5	ABNZS		ABNZHL, ABNMLL	ABNZSL
	ABNML		1.5			0.8				
	ABNZS		2.0			1.0				
(L Configurable)	ABNZHL		2.5			-				
	ABNMLL		3.0			-				
	ABNZSL	1	4.0	100	30-199	1.5				
	ABNZH		5.0			2.0				
	ABNML		6.0			3.0				
	ABNZS		-			4.0				
	ABNZHL		-			5.0				

■ 2-Core Threaded

Part Number	Type	Nominal	Nozzle Quantity	d	L		R (PT)	b1	b2	Unit Price	
					L Fixed	L 1mm Increment				L Fixed	L Configurable
(L Fixed)	ABNKH	1	2	1.0	100	20-99	1/8	0.5	1.0	ABNKH	ABNXH
(L Configurable)	ABNKH			1.5				1.0			
	ABNXH			2.0				2.0			

⚠ The pipe of d=1.0 ~ 3.0 can be manually bent (not applicable when d=4.0 or more). Be careful to bend referring to rough standard of minimum bending radius; O.D.x3.


⚠ An industrial cutter can cut the pipe, rolling it.

⚠ Main body may be discolored due to heat by brazing.

⚠ When Barbed Coupler Type is used in combination with tube, use the same number, as O.D. of tube on P.1385.

■ Barbed Coupler

Part Number	Type	No.	d	L		b	B	E	H	Unit Price	
				L Fixed	L 1mm Increment					L Fixed	L Configurable
(L Fixed)	ABNZT	4	1.0	100	20-99	0.5	6.9	3.4	7	ABNZT	ABNZTL
(L Configurable)	ABNZT		1.5			0.8					
	ABNZTL		2.0			1					
	ABNZTL		2.5			1.5					



■ Hose Nipple

Part Number	Type	No.	d	L		b	B	E	H	Unit Price	
				L Fixed	L 1mm Increment					L Fixed	L Configurable
(L Fixed)	ABNZP	4	1.7	100	20-99	0.9	8.5	6.5	7	ABNZP	ABNZPL
(L Configurable)	ABNZP										

Ordering Example	Part Number	Nozzle Quantity	d	L
	ABNZH5	-	1.5	100
	ABNZSL1	-	5.0	172
	ABNKH1	2	1.0	100